

PANEL LIGHT

Low profile performance panel light with maintainable LED emitting modules.

PANEL LIGHT


LPL-TB6060 (28/40W) / LPL-TB1230 (28/40W)

Features:

- / CRI >80 (3000k, 4000k)
- / Rated life 50,000 hours
- / Low profile side illuminated
- / <UGR19, High lumen packages
- / Standard driver: Non dimmable
- / Construction: all aluminium construction with optical clarity, high transmission lens
- / Can be mounted into plaster ceiling via the use of a plaster frame (by others)
- / White trim

Optional:

- / Optional dimmable driver(s): Trailing edge, DSI, DALI, PUSH DIM, 1-10V on request
- / Surface mount kit 40mm in height

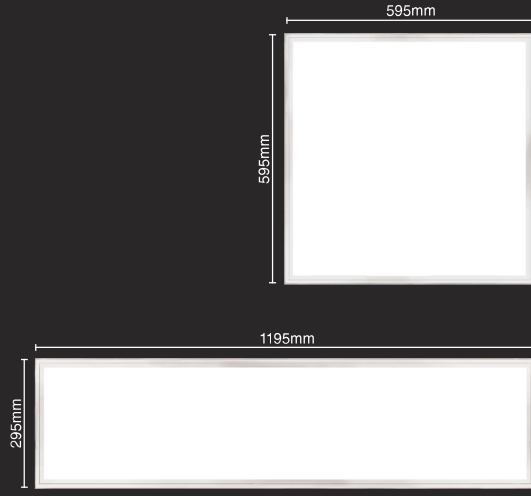

* 12mm overall height *